


MSR 12 plug-in module PR8

The PR8 pressure module processes and logs pressure and temperature values from external pressure sensors.

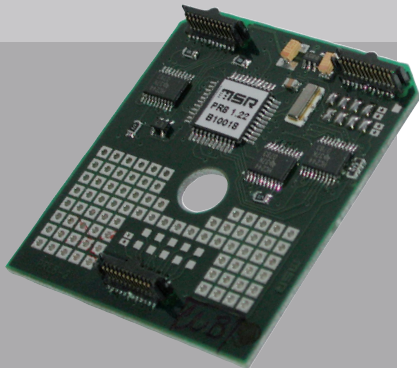

| | | |
|---------------------------------|---|-------------------------------------|
| Measured parameters: | Pressure Temperature of the pressure sensors | |
| Measurement range: | 0-15 000 mbar -10 °C to +60 °C | |
| Display resolution: | 1 mbar 1 °C | |
| Measurement rate: | 20/s 10/s 2/s 1/s | every 10s every 30s every 60s |
| Storage rate: | Every n th measurement value is stored (n = 1-256) | |
| Mode of operation: | Simultaneous measurements of all pressure values | |
| Input: | Max. 8 pressure sensors | |
| Storage capacity: | 1 000 000 measurements | |
| Integration with MSR 12: | By qualified personnel | |
| Item number: | B10018 | |
| Attachable sensors: | Pressure sensors | Item number |
| | P2500-4 AIR | B10130 |
| | P2500 WATER | B10121 |
| | P14K-3 AIR | B10127 |
| | P14K WATER | B10110 |

MSR Electronics GmbH
Oberwilerstrasse 16

中国代理商：
宏科汽车技术研究中心
广州市五山华南理工大学国家科技园
2号楼 504-505室 邮编：510640
电话：020-38743030; 38743032;
020-38743233
传真：020-38743233
sales@hkaco.com
www.hkaco.com

Distributor:

